

# Tank for diesel


## Government approved

### without box fuel dispensing unit

**TANK** with cylindrical horizontal axle fitted on anti-roll support brackets. Manufactured with top quality carbon steel S235JR UNI EN10025, submerged arc welded. Painted with epoxy powders, hydraulically tested and equipped of the following accessories: manhole diameter 420 mm with bolt and seals, 3" lockable rapid coupling ring-nut, with load-limiting valve calibrated at 90% of the tank geometric capacity, 1"-1/2 pressure relief valve with flame-breaker mesh. Externally visible level gauge with inner protection hose for the float, stair of access to the load (only for CD50, CD60, CD90), drain sleeve with ball valve on the bottom by 3/4" and security cap, eyebolts, plug grounding and equipotentiality. Connection for fuel diesel suction:  
 1 nipple 1 "  
 2 sleeves female 1 "



**CONTAINMENT BASIN** made of carbon steel sheet, self-supporting base frame already preset and bolted to the bottom of the tank, it can be placed on any type of ground. Equipped with safety cap 1" suitable for fixing the uprights of the roofing. The basin is entirely painted with epoxy powder.

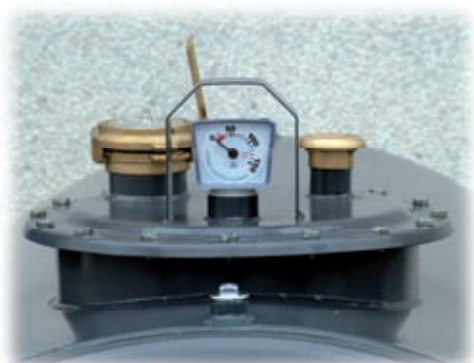

| Code     | Capacity (litres) | Dimension (without roof) (LxPxH mm) |
|----------|-------------------|-------------------------------------|
| CD15/B15 | 1500              | 1200x2000x1500                      |
| CD23/B23 | 2300              | 1400x2350x1700                      |
| CD30/B30 | 3000              | 1500x2450x1800                      |
| CD50/B50 | 5000              | 2000x3200x2000                      |
| CD60/B60 | 6000              | 2000x3200x2200                      |
| CD90/B90 | 9000              | 2100x3900x2300                      |