


# Tank for diesel

Government approved

with fuel dispenser box

and Basin of containment capacity 100%

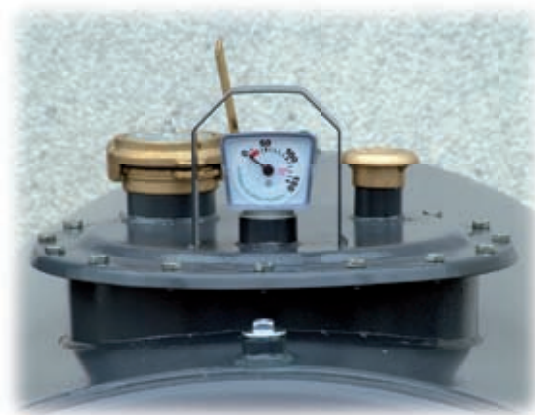

**TANK** with cylindrical horizontal axle, fitted on anti-roll support brackets. Manufactured with top quality carbon steel S235JR UNI EN10025, submerged arc welded. Painted with epoxy powders, hydraulically tested and equipped of the following accessories: manhole diameter 420 mm with bolt and seals, 3" lockable rapid coupling ring-nut, with load-limiting valve calibrated at 90% of the tank geometric capacity, 1"-1/2 pressure relief valve with flame-breaker mesh. Externally visible level gauge with inner protection hose for the float, stair of access to the load (only for CD50, CD60, CD90), drain sleeve with ball valve on the bottom by 3/4" and security cap, eyebolts, plug grounding and equipotentiality, external suction with non-return valve 1", ball valve 1" pipe and rigid connecting to the fuel dispensing unit.

**FUEL DISPENSING UNIT** inside in metal box, with tamperproof lock and a dispenser nozzle bracket, self priming electric pump with by bass capacity 50 or 70 or 90 litres/min. (220 V/50 Hz), meter for private use with partial volume to 3 figures and progressive total to 6, flexible hose with connection 6 m. length, automatic nozzle with swivel coupling, IP 55 control pannel with start-up device "Pump block" to lowest level.

**CONTAINMENT BASIN** made of carbon steel sheet, self-supporting base frame already preset and bolted to the bottom of the tank, it can be placed on any type of ground, with a capacity of not less than 100% of the overall geometric capacity. Equipped with safety cap 1" suitable for fixing the uprights of the roofing. The basin is entirely painted with epoxy powder.



Code	Capacity (litres)	Pump flow (l/min)	Dimension (without roof) (LxPxH mm)
CD15/GE50/B15100%	1500	50	1200x2000x1500
CD23/GE50/B23100%	2300	50	1400x2350x1700
CD30/GE50/B30100%	3000	50	1500x2450x1800
CD50/GE50/B50100%	5000	50	2000x3200x2000
CD60/GE50/B60100%	6000	50	2200x3200x2200
CD90/GE50/B90100%	9000	50	2400x3900x2300

CD50/GE70/B50100%	5000	70	2000x3200x2000
CD60/GE70/B60100%	6000	70	2200x3200x2200
CD90/GE70/B90100%	9000	70	2400x3900x2300

CD50/GE90/B50100%	5000	90	2000x3200x2000
CD60/GE90/B60100%	6000	90	2200x3200x2200
CD90/GE90/B90100%	9000	90	2400x3900x2300