

# Transportable

Tanks for diesel fuel transport and distributing, compliant with ADR regulations



litres 380



litres 620



litres 250


litres 450




litres 910

**TRANSPORTABLE TANK** with cylindrical horizontal axle (vertical for 250 and 450 litres) built in carbon steel, welded inside a strong chassis, roll away protection and impact resistance. Epoxy painted, equipped with bulkheads anti-slosh to limit the shaking of the liquid (only for 620 and 910 models). Hatch for internal inspection 400 mm diameter, tight with flange 10 mm thick with bolts and gasket. Safety valve diameter 3 " according to law. Fusible plug protection of fire interior, coupling bronze 3" quick setting lockable. Eyebolts, hubs to forklift forks, anchoring holes at deck.


**FUEL DISPENSING UNIT** inside in metal box, with tamperproof lock and a dispenser nozzle bracket, self priming electric pump with by-pass 12 or 24 volt D.C., capacity 40 or 70 l/min., meter for private use with partial volume to 3 figures and progressive total to 6, flexible hose with connection 4 m. length, automatic nozzle with swivel coupling, connecting cable with pliers.

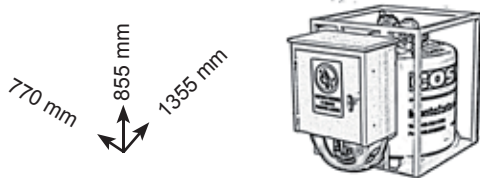


Capacity (litres)	Pump flow (l/min)	Weight (Kg)	Code
<b>250</b>	40	105	T250 GE40
	70	110	T250 GE70

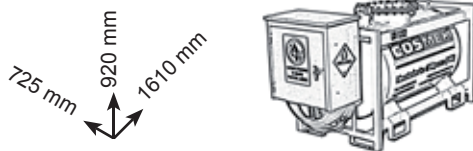


Capacity (litres)	Pump flow (l/min)	Weight (Kg)	Code
<b>380</b>	40	133	T380 GE40
	70	138	T380 GE70

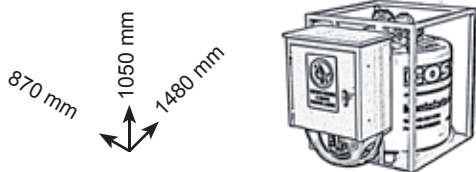

Capacity (litres)	Pump flow (l/min)	Weight (Kg)	Code
<b>450</b>	40	138	T450 GE40
	70	143	T450 GE70

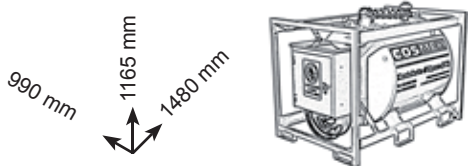

Capacity (litres)	Pump flow (l/min)	Weight (Kg)	Code
<b>620</b>	40	149	T620 GE40
	70	154	T620 GE70

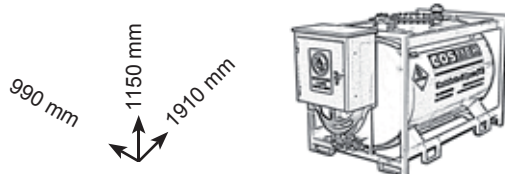

Capacity (litres)	Pump flow (l/min)	Weight (Kg)	Code
<b>910</b>	40	204	T910 GE40
	70	209	T910 GE70